

Some items are subject to freight charges.

All prices include GST. Plug & lead not supplied on 415 volt machines. Specifications & prices are subject to change without notice.

QUALITY TOOLROOM LATHES

STANDARD TM SERIES FEATURES

- Triple bearing headstock
- High quality one-piece Meehanite cast base
- Induction hardened and precision ground slideways
- 78mm Spindle Bore on TM1740G & TM1960G
- 115mm Spindle Bore on TM2680G & TM26120G
- Precision hardened and ground SCM-21 Spindle has a triple bearing support system
- 12 Spindle speeds from 20 to 2000rpm on TM1740G and TM1960G,
- 15 Spindle speeds from 15 to 1100rpm on TM2680 & TM26120G
- Four position long feed knockout system is easily and quickly adjusted
- Rapid feed on saddle (TM-26 models only)

TM-1740G

430 x 1000mm

with factory fitted 2-axis DRO

TM-1960G


480 x 1500mm

(L632)

(L632D) with factory fitted 2-axis DRO

(L634)

(L634D)

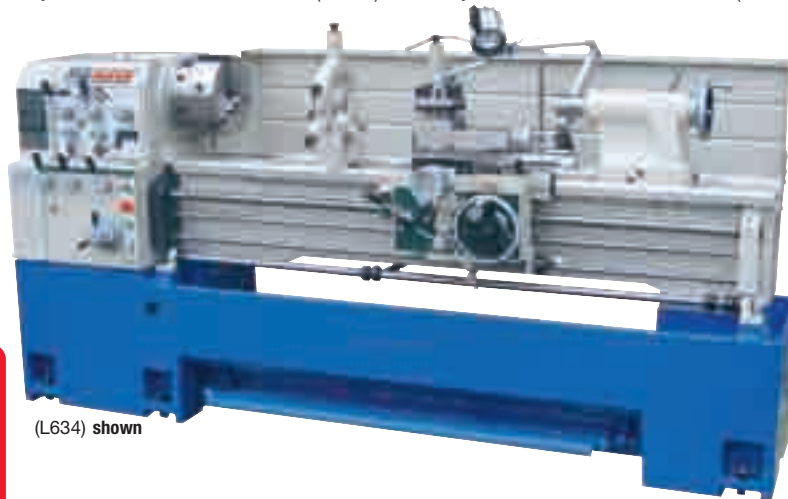

(L634) shown

STANDARD TM SERIES ACCESSORIES:
3-jaw chuck with reverse jaws, 4-jaw chuck, faceplate, spindle reducing bush, 2 x dead centres, coolant system, fixed & travelling steadies, worklight, splashtray, 4-position longfeed knockout & instruction booklet

TM-2680G

660 x 2000mm

with factory fitted 2-axis DRO

(L639)

(L639D)

TM-26120G

660 x 3000mm

with factory fitted 2-axis DRO

(L642)

(L642D)



(L642D) shown

4-POSITION LONG-FEED KNOCKOUT

MANUFACTURED
IN TAIWAN

ONE PIECE CAST IRON BASE

SPECIFICATIONS

MODEL	TM1740G	TM1960G	TM2680G	TM26120G
CODE	L632	L634	L639	L642
Swing Over Bed	430mm	480mm	660mm	660mm
Swing Over Cross Slide	242mm	275mm	433mm	433mm
Swing Over Gap	650mm	700mm	890mm	890mm
Distance Between Centres	1018mm	1525mm	2032mm	3048mm
Width of Bed	300mm	300mm	400mm	400mm
Spindle Nose	D1-8	D1-8	D1-11	D1-11
Spindle Bore	78mm	78mm	115mm	115mm
Spindle Bore Taper	6MT	6MT	7MT	7MT
Tail Spindle Diameter	58mm	68mm	85mm	85mm
Tail Spindle Taper	4MT	4MT	5MT	5MT
Spindle Speed Range	12 speeds (20-2000rpm)	12 speeds (20-2000rpm)	12 speeds (15-1100rpm)	12 speeds (15-1100rpm)
Inch Threads Range	4-56TPI	4-56TPI	2-56TPI	2-56TPI
Metric Threads Range	0.5-7mm	0.5-7mm	0.5-7mm	0.5-7mm
Longitudinal Feeds Range	0.037-0.8mm	0.037-0.8mm	0.05-0.82mm	0.05-0.82mm
Main Drive Motor 415V	5.5kW (7.5HP)	5.5kW (7.5HP)	11.25kW (15HP)	11.25kW (15HP)
Weight	1760kg	2075kg	2850kg	3700kg