


**BELT DRIVE AUTO FEED**  
**PD-38A** (D172)

**FEATURES:**

- 2-speed (0.1, 0.2mm) Automatic Feed
- Large 30mm drill capacity
- Quick-single action belt change level to raise belt guard & adjust belt tension
- Powerful 1.5kW 2-speed 415V motor
- Safety microswitch on belt guard
- Adjustable depth setting for increased productivity
- Chuck guard with micro-switch
- Automatic drill ejector
- Includes coolant pump, worklight & drill chuck
- Weight: 400kg

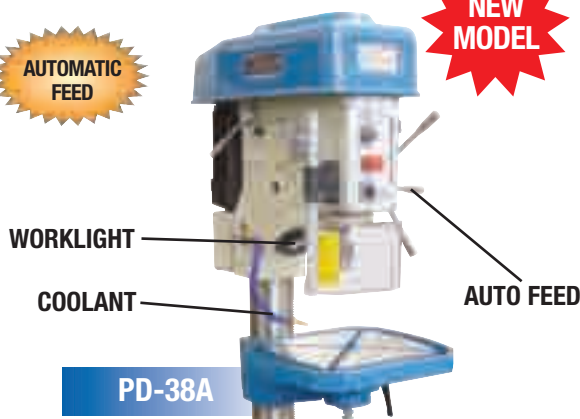

**GEARED HEAD AUTO FEED SERIES**  
**GHD-38A** (D132)

**FEATURES:**


- 2-speed (0.1, 0.2mm) Automatic Feed
- Automatic thread tapping with auto reversal of direction upon reaching the preset depth
- Modern electrics to European CE standards
- Emergency stop switch and overload protection
- Adjustable depth setting for increased productivity
- Chuck guard with micro-switch
- Includes coolant pump, worklight, keyless chuck & drill sleeves



**GHD-45A** (D137)

**FEATURES GHD-45A:**

- 4-speed Automatic Feed
- Automatic thread tapping with auto reversal of direction upon reaching the preset depth
- Electric push button feed engagement
- Modern electrics to European CE standards
- Emergency stop switch and overload protection
- Adjustable depth setting for increased productivity
- Complete with coolant pump and worklight
- Square work table tilts to  $\pm 45^\circ$
- Motorised UP/DOWN table
- 42rpm low speed for heavy drilling
- Digital depth gauge

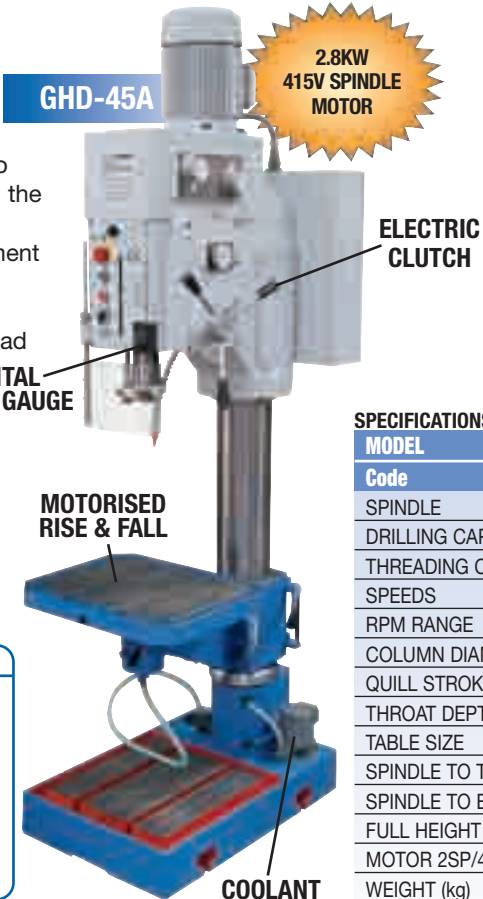

**SPECIFICATIONS**

MODEL	PD-38A	GHD-38A	GHD-45A
Code	D172	D132	D137
SPINDLE	3MT	4MT	4MT
DRILLING CAP	30mm	38mm	50mm
THREADING CAP	-	M24	M30
SPEEDS	10	18	12
RPM RANGE	80-1800	50-1450	42-2050
COLUMN DIAMETER	130	140	160
QUILL STROKE	155mm	180mm	180mm
THROAT DEPTH	305mm	350mm	360mm
TABLE SIZE	500 x 460mm	560 x 560mm	578 x 450mm
SPINDLE TO TABLE	890mm	770mm	600mm
SPINDLE TO BASE	1270mm	1320mm	1200mm
FULL HEIGHT	1945mm	2220mm	2330mm
MOTOR 2SP/415V	0.8/1.5Kw	0.8/1.5Kw	2.2/2.8Kw
WEIGHT (kg)	400kg	595kg	680kg

**OPTIONAL ACCESSORIES**

**DRILL VICE**  
160mm H/Duty (V143)

**Soluble Cutting Oil**  
5 Litres (S090)

**20 Litres** (S091) 5 Litre

**Drilling Vices - see Pg45**