

Some items are subject to freight charges.
 All prices include GST. Plug & lead not supplied on 415 volt machines.
 Specifications & prices are subject to change without notice.




HYDRAULIC PANBRAKES


- PB-425 (1220 x 2.5mm)** (S577)
- PB-435 (1220 x 3.5mm)** (S578)
- PB-825 (2540 x 2.5mm)** (S579)
- PB-835 (2540 x 3.5mm)** (S580)
- PB-1035 (3050 x 3.5mm)** (S582)

FEATURES:

- Heavy duty steel fabricated construction
- 0 - 130° protractor with micro switch angle stop
- Roving foot pedal operates clamp bar
- Hydraulics and tank are built into base of frame
- Joystick controller for manual/auto operation
- Auto: After clamp bar is locked, the bottom beam will bend to preset angle and return
- Fingers are hardened and ground

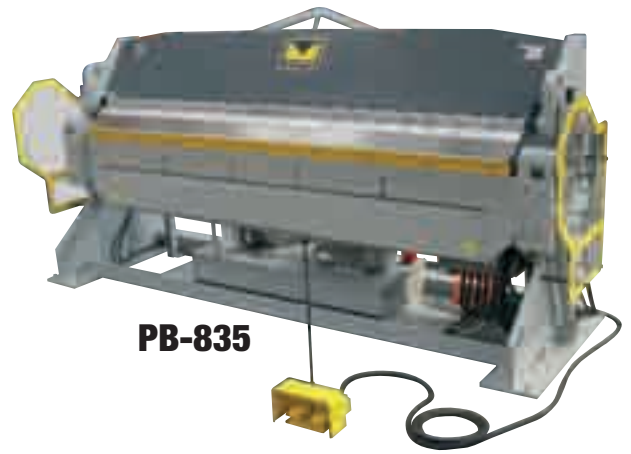

PB-835

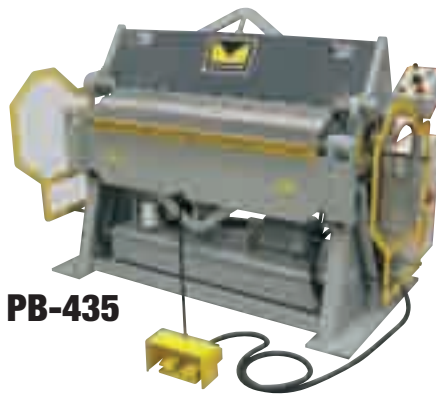

PB-435



Bending Angle Indicator



Fingers are hardened & ground

SPECIFICATIONS

MODEL	PB-425	PB-435	PB-825	PB-835	PB-1035
CODE	S577	S578	S579	S580	S582
BENDING LENGTH	1220mm	1220mm	2540mm	2540mm	3048mm
MILD STEEL	2.5mm	3.5mm	2.5mm	3.5mm	3.5mm
STAINLESS STEEL	1.2mm	1.6mm	1.2mm	1.6mm	1.6mm
BENDING ANGLE INDICATOR	0-130°	0-130°	0-130°	0-130°	0-130°
MOTOR (HP) 415V	3HP	3HP	3HP	5HP	5HP
WEIGHT (kg)	1400kg	1450kg	2050kg	2400kg	2800kg



PB-830 (2500 x 3.5mm)

(S584)

FEATURES:

- Heavy duty steel fabricated construction
- 0 - 130° protractor with micro switch angle stop
- Roving foot pedal operates clamp bar
- Hydraulics and tank are built into base of frame
- Manual or Auto mode
- Auto: After clamp bar is locked, the bottom beam will bend to preset angle and return

SPECIFICATIONS

MODEL	PB-830
CODE	S584
BENDING LENGTH	2500mm
MILD STEEL	3.5mm
STAINLESS STEEL	2mm
BENDING ANGLE INDICATOR	0-130°
MOTOR (HP) 415V	5HP
WEIGHT (kg)	3000kg