



Some items are subject to freight charges.
All prices include GST. Plug & lead not supplied on 415 volt machines.
Specifications & prices are subject to change without notice.


ELECTRO-MECHANICAL/HYDRAULIC GUILLOTINES

MG-432 1250 X 3mm

(S609)

FEATURES:

- **Electro mechanical operation** for high stroke rate
- 1250mm x 3mm cutting capacity
- Single or multiple cutting
- Quick adjustment of blade clearance
- Squaring arm
- Front arm supports
- Foot pedal control
- 3kW 415V motor
- 635mm windout Backgauge with mechanical counter
- Rear guarding included

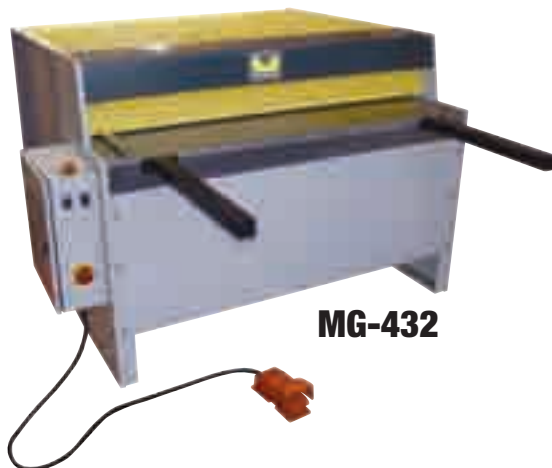

MG-432

HG-430 1320 X 3.2mm

(Manual backgauge)

(S574)

FEATURES:

- **Hydraulic operation**
- 1320 x 3.2mm cutting capacity
- 415V 5HP Motor
- Foot pedal control with emergency stop button
- Manual back gauge 600mm capacity
- Front arm supports
- Rear guarding supplied
- High carbon, high chrome alloy-tool steel blades



HG-430

HG-840 (2500 x 4mm)

(S627)

(Manual backgauge)

HG-841 (2500 x 4mm)

(S628)

(Motorised backgauge)

FEATURES:

- **Hydraulic operation**
- Heavy duty underdriven machine construction
- Rack and pinion backgauge
- **Motorised backgauge with counter (HG841)**
- Roving foot pedal control
- Shadow-line lighting
- Transfer ball table
- Includes rear guarding with electrical interlock



HG-840

SPECIFICATIONS

MODEL	MG-432	HG-430	HG-840	HG-841
CODE	S609	S574	S627	S628
SHEARING THICKNESS(mm)	3	3.2	4	4
SHEARING LENGTH(mm)	1250	1320	2500	2500
STROKES(/min)	33	12	12	12
BLADE ANGLE	2°1'	2°	2°	2°
BACKGAUGE TRAVEL (mm)	635	600	540	540
MOTOR(kW)	3.0	4	5.5	5.5
WEIGHT(kg)	1440	1000	3400	3600



Manual Backgauge on HG-840



Backgauge counter on HG-841



General Tools (Adelaide) Pty Ltd Phone +618 8262 6199 Fax +618 8262 6044
7 Newcastle Crescent, Cavan, South Australia 5094
E generaltools@bigpond.com www.generaltools.com.au