

Some items are subject to freight charges.
 All prices include GST. Plug & lead not supplied on 415 volt machines.
 Specifications & prices are subject to change without notice.

HAFCO TOOLMASTER ACCESSORIES

5C COLLET CHUCK SET

(C980)

- Suits most lathes with 5MT spindle taper
- Complete with 5MT-5C adaptor, handwheel & drawtube



COLLET SETS T/S Metric or Imperial


7-piece sets

- Metric set (6,8,10,12,16,20,25mm) (C982)
- Imperial set (1/4", 5/16", 3/8", 1/2", 5/8", 3/4", 1") (C982A)
- 24Pce Metric Collet Set(3-26mm) (C984)

TAPER TURNING ATTACHMENT

- Suits Bench Lathes
- Tapers up to 15" length
- Comes with mounting brackets & stops
- Weight: 17kg

(L258)

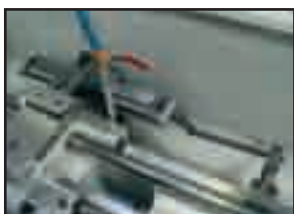

VERTICAL MILL SLIDE

Note:
 Will only suit Lathes with a centre height of 125mm or larger

3" x 4.5" slotted table (L277)



CAN BE ADAPTED TO MOST BENCH LATHES


Complete with 2.5" vice to suit




QA-100 (L280)



QA-150 (L295)

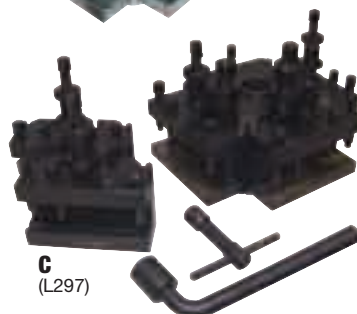

C (L297)



B (L296A)

QUICK CHANGE TOOLPOSTS

- Design suits most HAFCO lathes
- All bearing surfaces are precision ground
- No shims are required to adjust tools to correct centre height
- Holders supplied: 5 std. & 1 boring bar type (A, BR-BP, B)
 QA-100: 5 standard
 QA-150: 3 std. + 1 boring bar type

CODE	MODEL	CH	PRICE
L280	QA-100	75-115	
L292	QA-140	140-160	
L295	QA-150	150-170	
L293	A	168	
L294	BR-BP	202	
L296	B	230	
L297	C	280	
L298	D	350	

CH = LATHE CENTRE HEIGHT IN (mm)

EXTRA TOOLPOST HOLDERS

CODE	MODEL	CH	PRICE
L280A	QA-100	75-115	
L292A	QA-140	140-160	
L293A	A	168	
L294A	BR-BP	202	
L295A	QA-150	150-170	
L296A	B	230	
L297A	C	280	
L298A	D	350	

PIPE CENTRES

- The centre uses a combination of taper roller bearings & ball bearings
- The cone has a taper of 70° & is manufactured using CR-MO steel

CODE	TAPER	CONE DIA.	WT.(kg)	PRICE
C045	MT3	100mm	2.95	
C046	MT4	125mm	5.4	
C047	MT5	150mm	9.3	



LIVE CENTRES

Manufactured in Europe, SKODA Live Centres come in a standard range or extended point models. The front radial bearing is adjustable (Maximum weight listed for extended point models is approx. 20% less than standard point models)




SIZE	MAX. SPEED	MAX.WT. AT 63RPM	EXT. POINT PRICE	CODE	STD. POINT PRICE	CODE
2MT	6000rpm	350kg		(C079)		(C070)
3MT	5000rpm	400kg		(C080)		(C072)
4MT	4000rpm	1300kg		(C081)		(C074)
5MT	3500rpm	2000kg		(C082)		(C075)
6MT	2500rpm	4000kg	-	-		(C076)



LIVE CENTRES

- Hardened tip
- Precision ground
- Taiwanese quality

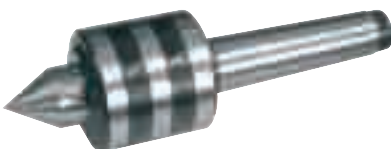

2MT (C050)
 3MT (C052)
 4MT (C054)

INTERCHANGEABLE TIP CENTRES

- Both models include 7 assorted tips – as shown



2MT (C062)
 3MT (C063)
 SKODA
 4MT (C067)

