


Some items are subject to freight charges.  
All prices include GST. Plug & lead not supplied on 415 volt machines.  
Specifications & prices are subject to change without notice.

# MITRE CUTTING METAL BANDSAWS

## EB-260A

(B061)

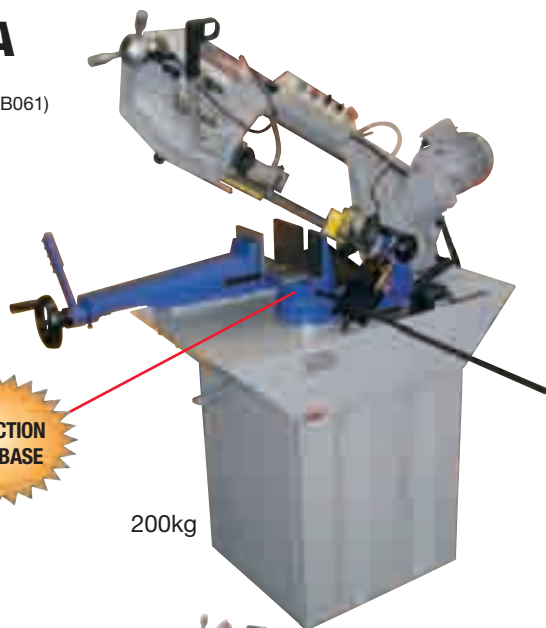

QUICK ACTION SWIVEL BASE

200kg

## EB-270DS

2-speed motor

(B064)



DOUBLE MITRE

## EB-350DS

2-speed motor

(B068)



## EB-350DSA

Semi-Automatic operation

(B070)

AUTO CLAMPING



460kg

### FEATURES - ALL EUROSAW MODELS

- Larger capacity than conventional coldsaws
- Heavy-duty gear drive system
- Quick-action lock/release vice and swivel head adjustment to 60°
- Coolant system for cutting efficiency and blade life
- Input support roller for long stock
- Adjustable hydraulic cylinder for Auto Feed
- 2-speed motor enables the cutting of a variety of materials
- Vibration free, low noise operation ensures clean & high precision cuts
- Machine stand with integrated cooling fitted as standard

### BLADE CHART: to suit models EB-260A/270DS/A

CODE	TYPE	TPI	PRICE ea.	MATERIAL CAP. GUIDE
B472	BIMETAL	4-6		From 25 - 75mm
B474	BIMETAL	6-10		From 9.5 - 50mm
B476	BIMETAL	10-14		From 6.4 - 35mm

### EXTRA FEATURES EB-270DS/350DS

- Double mitre cut to 45° and 60° right and left
- Adjustable hydraulic resistance on cutting
- Unique sliding vice design
- Heavy duty gearbox and motor
- Hydraulic blade tension gauge
- Automatic blade breakage sensor
- EB-270DS 280kg, EB-350DS 360kg,

### EUROSAW SPECIFICATIONS

MODEL	Units (mm)		
	EB-260A & EB-270DS		
SECTION TYPE	■	●	■
Capacity at 90°	220 x 220	227	260 x 110
Right at 60°	85 x 85	90	-
Right at 45°	145 x 145	150	200 x 125
Left at 45°	*110 x 110	*110	*160 x 110
Blade Speed - (mm/min)	72 / 36		
Motor	1.5HP 415V		

### BLADE CHART: to suit models EB-350DS/A

CODE	TYPE	TPI	PRICE ea.	MATERIAL CAP. GUIDE
B516	BIMETAL	4-6		From 25 - 75mm
B518	BIMETAL	6-10		From 9.5 - 50mm
B520	BIMETAL	10-14		From 6.4 - 35mm

### EXTRA FEATURES EB-350DSA

- Semi/Automatic control with hydraulic vice & foot pedal
- Double mitre cut to 45° and 60° right and left
- Automatic blade breakage sensor
- Adjustable hydraulic down feed
- Hydraulic locking vice with unique sliding design
- Hydraulic blade tension gauge
- Remote foot-switch including emergency stop switch

### EUROSAW SPECIFICATIONS

MODEL	Units (mm)		
	EB-350DS/A		
SECTION TYPE	■	●	■
Capacity at 90°	260 x 260	270	350 x 220
Right at 60°	150 x 150	160	-
Right at 45°	220 x 220	240	240 x 160
Left at 45°	*180 x 180	*210	*180 x 180
Blade Speed - (mm/min)	68 / 34		
Motor	2HP 415V		